

Instruction Sheet 1

JK Inner Flare Kit

Product

Removable Fender Flares

Model

2007- Jeep JK 2-4 door

Part Number

JK001

Tools Required

- Die Grinder with cut off wheel
- Or Hacksaw
- 10mm Socket
- Primer or Rust Inhibitor
- 5/32 drill bit
- 7/16 wrench
- Nut-sert setting tool
- Plastic clip removal tool



Remove OEM Flares



Install plastic Bracket using existing hardware.



Cut off support arm flush with plastic bracket



Apply primer or rust inhibitor to the cut edge of the support arm.




Drill 5/32" hole in support arm, using plastic bracket as guide. Tap hole with 1/4 x 20 tap provided



Clip on inner fender flare, attach with three 1/4 x 20 bolts, using flat washers and lock washers, bolts go in from back of fender



Remove OEM rear flares

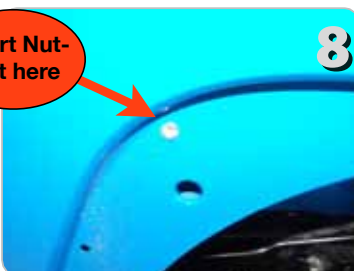

Install nut-sert into hole shown on both sides of vehicle



Install nut-sert into hole shown on both sides of vehicle



Clip on the inner fender flare. Attach with two 1/4 x 3/4" bolts using washers and lock washers



Remove OEM light from stock flare by twisting out of stock light



Twist bulb and holder into the new light in the outer fender flare

Parts Included in JK001 Inner Flare Kit

- Inner Flare LF
- Inner Flare LR
- Inner Flare RR
- Inner Flare RF
- Support Bracket L
- Support Bracket R
- Hardware Kit
- 1/4 x 20 Tap



! Warnings !

- Make sure you use proper safety gear when using power tools.
- This product is intended for use or sale for off-road purposes only!
- Always wear eye, ear and hand protection while working on machinery.
- Make sure outer flare is securely fastened before driving vehicle.

WARRANTY

TrailMods 2 in 1 Removable Flares are guaranteed to be free of defects in both materials and workmanship for 1 year given normal usage, proper maintenance and correct installation. The warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found to be defective by the factory.



Make sure all bolts are snug. Do not over tighten as it will pull the threads out of the aluminum nutserts.



Instruction Sheet 2

Outer Flares

Product

Removable Fender Flares

Model

2007- Jeep JK 2-4 door

Part Number

JK002



Thank you for purchasing the new TrailMods Removable Fender Flare system. 100% Made in USA.



You must have the inner flare kit installed before you can install the outer flares. The jeep should look like this.



Remove OEM light from stock flare by twisting out of stock light



Twist bulb and holder into the new light in the outer fender flare



Notice the rubber straps in the edge of the outer flare.



Start on one end of the flare and insert the rubber straps through the holes in the trough of the Inner Flare



The rubber strap should be sticking through the hole as show above



Bend rubber tab over the boss to secure. Work around the flare pulling the straps over the bosses.



Close the Support handle and you are done!



On the front flares you will need to rotate the support bracket until it rests against the boss on the Jeep



Closed Position



Plug in the light into the connector on the Jeep as shown. To remove just do the steps in reverse order

No Tools Required



For Outer Flare Installation

Parts Included in JK002 Outer Flare Kit

- Outer Flare LF
- Outer Flare RF
- Outer Flare LR
- Outer Flare RR
- Instruction Sheet

CARE INSTRUCTIONS

Your new flares are durable and strong, however, when they are off the vehicle they should be stored in a manner that they will not get scratched or crushed. They are made of plastic so do not store in direct sunlight as they may warp



! Warnings !

- Make sure you use proper safety gear when using power tools.
- This product is intended for use or sale for off-road purposes only!
- Always wear eye, ear and hand protection while working on machinery.
- Make sure outer flare is securely fastened before driving vehicle.

WARRANTY

TrailMods 2 in 1 Removable Flares are guaranteed to be free of defects in both materials and workmanship for 1 year given normal usage, proper maintenance and correct installation. The warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found to be defective by the factory.

