




## Tow Hook Installation Instructions

P/n #'s 11303.03 (Chrome), 11236.02 (Black Powder) and 11236.04(Black Powder)

### All Jeep® CJ™

All CJ™ models require the use of the two front bolt holes (See Diagram A – Holes # 1 & 2). The tow hook can be mounted on either driver or passenger side of the vehicle on the frame. There are (2) holes on top of the frame: one attaches the front bumper and the other is located on the front frame cover (frame cover may have to be drilled). Remove the existing bolt for the front bumper and, using the hardware supplied in the kit, bolt the hook (and optional safety catch) to the frame. NOTE: Most CJ™ models will utilize the bolts and nuts supplied in the kit, however, some CJ™ model frames may have threaded holes. If so, use the mounting instructions below for the YJ™ Wrangler™. Torque bolts to 65 lbs.

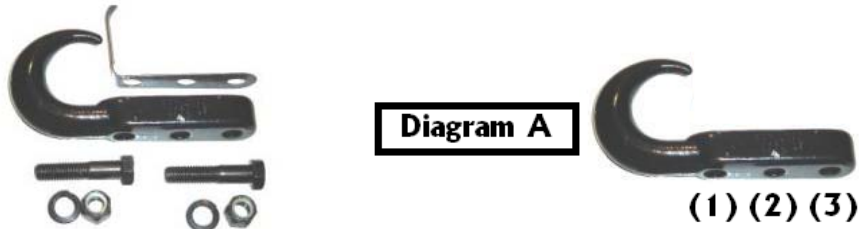

### 1987-95 Jeep® YJ™ Wrangler™

YJ™ Wrangler™ models require the use of the front and rear bolt holes at either end of the hook (See Diagram A – Holes # 1 & 3). The tow hook can be mounted on either driver or passenger sides of the vehicle on the frame. There are (2) holes on the top of the frame: one attaches the front bumper and the other is located on the front frame cover (frame cover may have to be drilled). Remove the existing bolt for the front bumper and, using the hardware supplied in the kit, bolt the hook (and optional safety catch) to the threaded holes in the frame. Torque bolts to 65 lbs. NOTE: on some YJ applications there may be interference with the round cross tube located beneath the mounting frame holes. Use a 2" (short) grade 8 bolts for this application (not supplied).

### 1997-02 Jeep® TJ™ Wrangler™

TJ™ Wrangler™ models require the use of the two rear bolt holes of the hook (See Diagram A – Holes # 2 & 3). The tow hook can be mounted on either driver or passenger sides of the vehicle on the frame. There are (2) holes on the top of the frame: one attaches the front bumper and the other is located on the front frame cover (frame cover may have to be drilled). Remove the existing bolt for the front bumper and, using the hardware supplied in the kit, bolt the hook (and optional safety catch) to the threaded holes in the frame. Torque bolts to 65 lbs.

### Universal Mounting and Rear Mounting on Jeeps®

11303.03 & 11236.02 Tow Hooks can be mounted on any flat surface on any vehicle using the supplied hardware. Once a location is found, use the hook as a template and drill (2) 1/2" holes in the frame for any two of the tow hook holes (existing holes in the frame can also be used). Be sure to check for wires, fuel lines, etc. behind the frame before drilling. Bolt the hook (and optional safety catch) to the frame with the supplied hardware. Torque to 65 lbs.



Tow Hooks are warranted against manufacturer's defects for ninety (90) days from consumer purchase. Consult your sales representative for further information.

Jeep® CJ™, YJ™, TJ™, and Wrangler™ are registered trademarks of Daimler Chrysler Corporation and their respective owners. The manufacturer and distributors of these products are not affiliated with Daimler Chrysler.



**LIMITED 90 DAY WARRANTY**

Applies to Rugged Ridge by Omix-ada Inc. Products

Rugged Ridge Off Road (the Company) warrants to the original purchaser of this product that should the product or any part thereof, under normal use and conditions, be proven defective in material or workmanship within 90 DAYS from the date of original purchase, such defect(s) will be repaired or replaced or credited at the Company's sole option.

To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage (e.g. Dated bill of sale), specification of defect(s) to the place of purchase or, with prior approval from the Company (Return Authorization Number is required), freight pre-paid to the Company address listed below.

This warranty does not apply to any product or part thereof which, in the opinion of the Company, has suffered or been damaged through alteration, improper installation, mishandling, misuse, neglect, accident or by acts of nature. THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

This Warranty is in lieu of all express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERHCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN THE PERIOD OF 90 DAYS FROM DATE OF ORIGINAL PURCHASE.

IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product.

Some States do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.

Omix-ada Inc.  
460 Horizon Dr. Suite 400  
Suwanee, Georgia 30024