


## **Installation Instructions**

JL Unlimited Cargo Liner
JL4CL18
fits JL Unlimited 2018-

-Thank you for purchasing a Dirtydog 4x4 Cargo Liner. Please read these instructions fully to familiarize yourself with the installation. Set aside 15 minutes for the first time you install your cargo liner. This item can be installed with a hard or soft top.


The dirtydog4x4 cargo liner can be installed with hard top or soft top. For hard top owner you will use your existing hardware that bolts the hard top on to the fenders. Remove the six bolts (3 each side). You will insert one of our ties with the grommet and rectangular loop on each bolt with one flat washer and one shoulder washer and reinstall the bolt back onto the hard top. For soft top owners you will use the bolt provided in the hardware package.

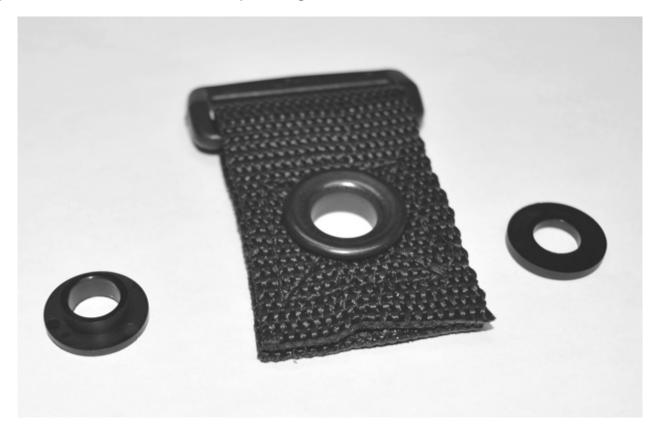

The first step is to insert the 50" metal bar in the sleeve at the front end of the cargo liner as shown. As you are inserting the bar through you will see 4 slots cut out along the top of the cargo liner. As you are sliding the bar through at each cut out you will need to install a cam buckle loop in the first cut out then the 28" strap through the second and third slot and then a cam buckle loop on the fourth slot.





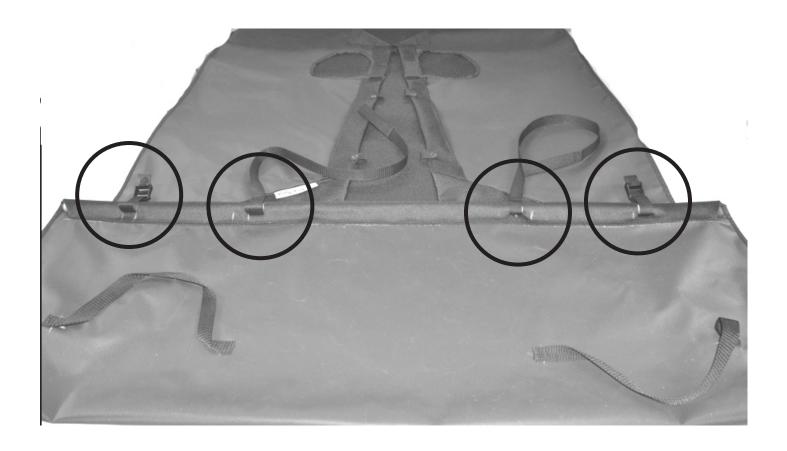

Once the bar is in place you can put the liner in place with the back seats down. (Once this installation is done we will show you how install it with the back seats up.) There are two straps sewn to the back side of the cargo liner. These two straps loop around the rear seat head rest as shown. The two straps around the top go around the front seat head rest and connect to the cam lock.





Now you can connect the snaps down the side on to the structure-d-rings you installed earlier. The tail end of the liner should line up with the end of the bed and velcro down to the carpet.



To install the door /bumper protector you must clean the inside door surface first. You will need to stick the 3 adhesive velcro strips to the door as shown. Use the door protector piece to line up where the velcro is positioned. Use the alcohol wipes to clean the area where the adhesive velcro strips will be attached.





The tail end our the cargo line has a flap that hooks over the cargo access door on the floor of the jeep

Dirtydog 4x4
2025 Dundas St. E.
Mississauga, ON
Canada
855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com